




Version 5.3.1

16.08.2011 /

(Standard)

**OSNA8591-K**  
**R717 [NH3]**  
 T SST -30°C  
 SCT 35°C  
 ECO  
 Auto  
**t 80°C**  
 5K  
 100%  
 2900 /min  
 100%

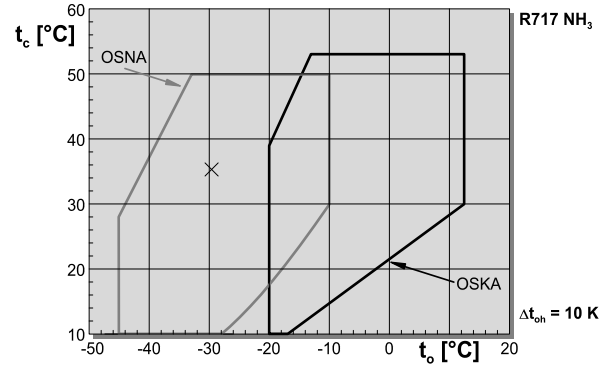

**OSNA8591-K**

-	165.7 kW
- *	165.7 kW
-	165.7 kW
.	80.1 kW
-	192.9 kW
/	2.07
/ *	2.07
.	466 kg/h
.	554 kg/h
	ECO
.	-9.89 °C
.	87.9 kg/h
-	27.1 kW
.	-9.89 °C
ECO-	2.93 bar(a)
.	<b>3.38 m/h</b>
-	<b>47.7 °C</b>
-	<b>52.9 kW</b>
.	110.0 kW
.	<b>215 °C</b>

\* EN12900 (5K "open flash")